




VITAL ENGINEERING & ANGUS MCLEOD

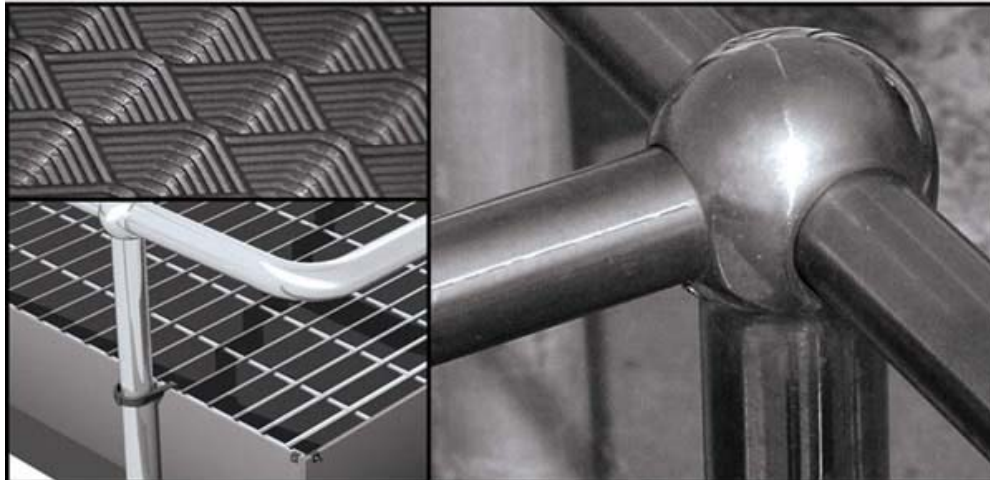

gratings • expanded metal • handrails • vitagrid • maclock • vitacon • vitex

Your **First** Choice.
Vital support.

Content

Vital Engineering Introduction.....	02
Grating Terminology.....	03
Vitagrid Walkway Flooring.....	05
Vitagrid Heavy Duty Flooring.....	07
Vitagrid Aluminium Flooring.....	08
Vitagrid Stainless Steel Flooring.....	09
Standard Flooring Panels.....	10
Diamond Pattern.....	11
Stairtreads.....	12
Vitacon.....	14
Vitaglass Gratings.....	15
Vitex Expanded Metal.....	18
Load Tables.....	19
Handrailing Products.....	23
Fixings.....	28
Supa Service.....	29
Interactive CD.....	30



YOUNG & GROWING



ENISO 9001-2000

Vitacon

Vitacon has the unusual feature of having a diamond mesh serrated pattern, giving excellent non-slip characteristics and in it's completed form, offering a lightweight, but strong section, ideal for use in conveyor walkways, inclines or where slip resistant floors are required. Supplied in standard 750mm long by 250mm wide sections, this offers the potential designer easy-to-use increments to obtain optimum utilisation for a modular fitting floor area. These sections may be bolted together, laid side by side and welded at intervals inside the angle frames making the installation a breeze and which give a continuous floor appearance with no loss of grip at all. Materials in which this product is manufactured in, are mild steel and aluminium only. **Aluminium loadings are available on request.**


Vitacon Loading Table

	Spans in mm		
	500	750	1000
U	3565	1580	885
d	0.94	1.41	1.88
C	881	592	442
d	0.38	0.85	1.51

Panel width = 250mm

Mass = 6.4kg/m

Vitacon Dimple Floor has been developed for a specific consumer market where industrial serrated surfaces are too aggressive for the application required. Vitacon Dimpled floor offers the same advantages as the Vitacon Serrated floor without the severe aggressive surface. As can be seen from the picture, this product is ideal for storage flooring, shelving or racking walkways requiring the passage of wheeled trolleys, building sites, control room floors and many other similar applications where a firm grip is required underfoot. The product is manufactured in two widths of 250mm or 300mm in 6m lengths with standard raised perforations as shown.

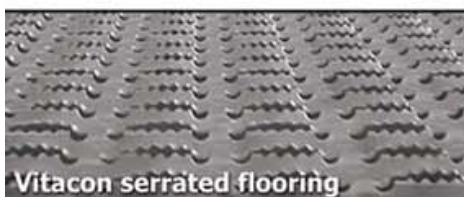

Contact Us

Vital Engineering (Pty) Ltd & Angus McLeod & Co (Pty) Ltd

P.O. Box 6099, Dunswart, 1508
Lea Road, Anderbolt, South Africa
Telefax: +27 (11) 918 3000
Tel: +27 (11) 898 8500
E-Mail: sales@gratings.co.za

Vital Sales Durban (Pty) Ltd

Tel: +27 (31) 902 3059
Fax: +27 (31) 902 2948
E-Mail: vitaldbn@gratings.co.za

Vital Sales Cape Town (Pty) Ltd

Tel: +27 (21) 534 1429
Fax: +27 (21) 534 6127
E-Mail: vitalct@gratings.co.za



www.gratings.co.za



**VITAL ENGINEERING
& ANGUS MCLEOD**